

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number  
WO 2004/041637 A1

(51) International Patent Classification<sup>7</sup>: B63H 9/06

[NO/NO]; c/o WING SAIL AS, Granneslia 20, N-4044  
HAFRSFJORD (NO).

(21) International Application Number:  
PCT/NO2003/000375

(74) Agents: ONSAGERS AS et al.; P.O.Box 6963 St. Olavs  
plass, N-0130 OSLO (NO).

(22) International Filing Date:  
6 November 2003 (06.11.2003)

(81) Designated States (*national*): AE, AG, AL, AM, AT (util-  
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,  
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-  
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE  
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,  
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO,  
RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ,  
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,  
ZM, ZW.

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:  
2002 5344 7 November 2002 (07.11.2002) NO

(71) Applicant (*for all designated States except US*): WING  
SAIL AS [NO/NO]; Granneslia 20, N-4044 HAFRS-  
FJORD (NO).


(84) Designated States (*regional*): ARIPO utility model (GH),  
ARIPO patent (GH), ARIPO utility model (GM), ARIPO  
patent (GM), ARIPO utility model (KE), ARIPO patent

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): LYNGHOLM, Tore

[Continued on next page]

(54) Title: FLUID-DYNAMIC DEVICE

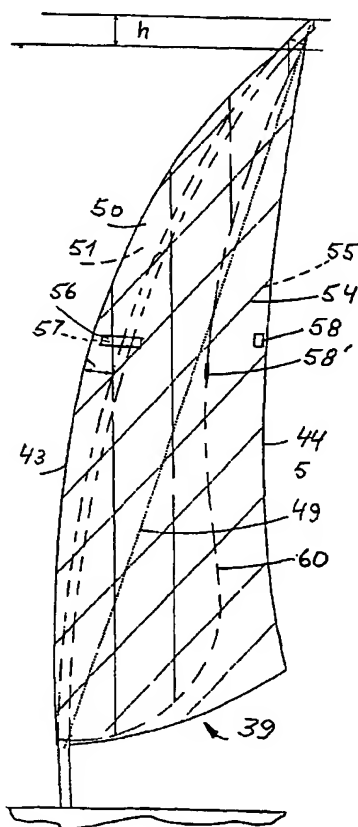

(57) Abstract: A fluid-dynamic device comprising a holder (41) which supports a body (42) around which a fluid is arranged to flow, where the fluid when flowing round the body exerts a force with a component which is directed across the fluid's direction of flow. The body (42) is made of a sailcloth or foil-like material, comprising two sailcloth portions (45, 46) which are joined along two respective, mutually corresponding edges, which together form an upstream edge (43). The holder (41) has two connecting devices for securing the body (42) at ends of the upstream edge (43) and for tightening the sailcloth portions (45, 46) between them while exerting a force and a reaction force along a connecting line (49) extending between the connecting devices. According to the invention the sailcloth portions (45, 46) have upstream areas (50, 51) between the upstream edge (43) and the connecting line (49).

WO 2004/041637 A1